

Technical information pre-fill Standard solvent-based



Prefill solvent-based

Art.no. 249303 (150 ml)

Art.no. 249297 (400 ml)

The ColorMatic pre-fill spray paint is prefilled with propellant and specific additives and then filled by VitoMat filling machines with the desired coat. Innovative spray and valve technology guarantee the fine broad jet atomisation, a high application rate and constant pressure for best workmanship and professional-quality end results.

The ColorMatic pre-fill sb for mixing system is a pre-filled can with propellant gases and solvent that can be filled with solvent-based basecoats. It was especially developed for the mixing system solvent-based.

Application: Ideal for spot repairs or refinishing parts in conjunction with ColorMatic mixing system solvent-based, art.no. 246999.

Quality and properties Physical and chemical data

- A spray can pre-filled with propellant and solvents. The paint is transferred via a filling device into the can to produce a ready-to-use end product (dealers liability)
- Simple, time-saving application
- Excellent atomisation
- Light blending

Ideal for spot or refinishing parts

- **Colour:** depending on filling
- **Smell:** solvent
- **Glanzgrad:** matt. Base coats always have to be re-coated with 1K or 2K clear coat. After applying clear coat, the base coat has a very good resistance to chemicals and weathering and a durable gloss.
- **Efficiency:**
Depending on consistence and colour of the ground
- **Substrate:**
Depending on the colour of the substrate apply [Primer Filler HG1 - HG8](#), [2K Primer Filler](#) no. 195 327, [1K Primer for ALU](#) no. 190 278, [1K Primer for Zinc](#) no. 190 285, [1K Epoxy Primer](#) no. 174 414, [1K Filler](#), beige no. 856 556, ColorMatic 1K Filler, grey no. 874 987, cured paint sanded
- **Drying time (at 20°C, 50% relative air humidity):** 8 - 10 Min.
The drying time depends on surrounding temperature, air humidity and thickness of the applied coat.
- **Storage stability:** empty cans: 5 years
Filled cans: 3 years
- **Size:**
Aerosol cans, maximum nominal volume 400 ml and 150 ml, filling quantity 100 ml for no. 249297, filling quantity for 150 ml can 30 ml, no. 249303
- **VOC-value:**
art.no. 249297: 216 g
art.no. 249303: 76 g

Disposal and labelling


Disposal: Please mind the residue inside the containers. Completely emptied containers can be used for recycling. If cans are not emptied, they should be disposed off as "special refuse".

Only for DE: In order to ensure a high reuse and recycling rate, the legislator requires, in accordance with §15 - VerpackG, Paragraph 1, the return of transport, sales or outer packaging, alternatively, however, deviating agreements can also be made.

Labelling: All products of European Aerosols comply with the current status of their labelling regulations. Classification and distinction takes place by the presently legal form of the **Globally Harmonized System of Classification and Labelling of Chemicals** (GHS) or rather by CLP 1272/2008/EG regulations. Our safety data sheets comply with the current form of REACH 1907/2006/EG, article 31 und appendix II,

Using instructions

Before use, carefully read and observe the warning texts on the label!

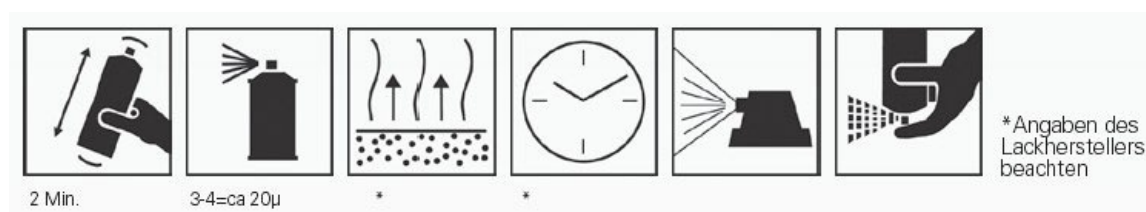

Order information

Disclaimer of liability

This application-technological information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively in the responsibility of the user. European Aerosols is let off the liability, unless the liability-based incident is caused by a fault incurred to European Aerosols.

As of August 1, 2013

This release replaces all eventually earlier issued versions

Print date: 16.08.2026

European Aerosols GmbH | Kurt-Vogelsang-Straße 6 | 74855 Haßmersheim | info-de@european-aerosols.com