

TEHNIČKE INFORMACIJE pre-fill Standard doza



ColorMatic prethodno punjene boje u spreju su pred-punjene sa pokretačima i posebnim aditivima, a zatim VitoMat strojevima za punjenje sa željenim premazom. Inovativna tehnologija spreja i ventila omogućuju široko raspršivanje, a visoka stopa uporabe i stalan tlak daju najbolje krajnje rezultate i kvalitetu izrade. ColorMatic standard za prethodno punjenje je prethodno punjena limenka sa pokretačkim plinovima i otapalom te se može napuniti sa temeljnim slojem na bazi otapala. Uporaba: idealan za manje popravke i završne dijelove.

KVALITETA I SVOJSTVA

- Limenka sa predpunjenjem plinom i otapalima. Boja se preko uređaja dodaje u limenku i na taj način se proizvodi proizvod koji je spreman za upotrebu. A spray can pre-filled with propellant and solvents. The paint is transferred via a filling device into the can to produce a ready-to-use end product (odgovornost trgovaca)
- Jednostavna aplikacija koja štedi vrijeme
- Izvrsno raspršivanje
- Blago miješanje

Physical and chemical data


- **Colour:** depending on filling
- **Smell:** solvent
- **Efficiency:** Depending on consistence and colour of the ground
- **Substrate:** Depending on the colour of the substrate apply [Primer Filler HG1 - HG8](#), [2K Primer Filler](#) no. 195 327, [1K Primer for ALU](#) no. 190 278, [1K Primer for Zinc](#) no. 190 285, [1K Epoxy Primer](#) no. 174 414, [1K Filler](#), beige no. 856 556, ColorMatic 1K Filler, grey no. 874 987, cured paint sanded
- **Drying time (at 20°C, 50% relative air humidity):** The drying time depends on surrounding temperature, air humidity, thickness of the applied coat and the filled type of paint (refer to information of the paint manufacturer)
- **Storage stability:** empty cans: 5 years
Filled cans: depending on type of paint from several hours up to 6 month (information from your specialist dealer). If appropriate storage provided (=10°-25°C, relative air humidity max. 60%)
- **Size:** Aerosol cans, maximum nominal volume 400 ml and 150 ml, filling quantity 100ml for no. 570704, filling quantity for 150ml can 37ml, no. M570707
- **VOC-value:** 218g

Označavanje

Odlaganje: Reciklirati i odlagati u za to predviđene spremnike samo u potpunosti prazne limenke. Limenke koje nisu prazne trebaju se zbrinuti kao "poseban otpad".

Obilježavanje/označavanje: Svi proizvodi proizvedeni u European Aerosols u skladu su sa propisima o označavanju prema direktivi 1999/45 / EG. Svi aerosoli odgovaraju TRGS 200 i TRG300 kao i aerosol direktivi 75/324/EWG u važećoj verziji.

- Clean the surface to be painted thoroughly with ColorMatic silicone cleaner no. 174 469, then sand
- Larger bare surfaces must be pre-primed with the appropriate ColorMatic primer
- The area must be dry and free of dust and grease
- Shake can vigorously for 2 minutes
- Carry out spray test
- Compatibility testing is necessary
- **For professional use only**
- **Wear an appropriate respirator (recommended type A2/P3)**

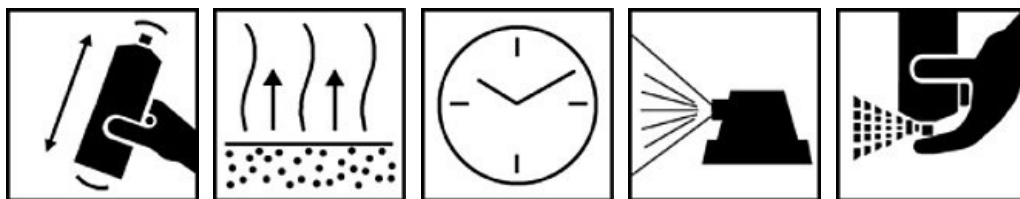

*Pay attention to manufacturer's instruction/ Angaben des Lackherstellers beachten

Order information

As of August 6, 2019

This release replaces all eventually earlier issued versions

Datum ispisa: 05.09.2026