

Technical Information Sheet Wheel Spray



ColorMatic velgenlak is een hoogwaardige acrylaatverf met een hoge dekking en een snellere droogtijd. De professionele breedstraalverneveling zorgt voor een uitstekende vloeiing en garandeert een positief resultaat.

Voor een optimale hechting moeten de aluminium wielen worden geprimerd met ColorMatic 1K Primer voor aluminium (Art. no. 190278). Stalen velgen moeten worden geprimerd met ColorMatic 1K Primer Filler.

Toepassing:

Ideaal voor het spuiten van nieuwe of gebruikte velgen.

Quality and properties

- Simple time-saving application
- Fast drying time
- Exceptionally high coverage
- Resistant to stone chips, road salt, etc.
- Abrasion resistant
- Robust against damage during automatic car wash

Physikalische und chemische Daten

- **Basis of binder:** NC
- **Colour:** black (no. 190353), silver satin glossy (no. 190377)
- **Smell:** solvent
- **Degree of gloss:** (at measurement angle 60° acc. to DIN 67530) glossy: 80 gloss units
- **Efficiency:**
Depending on consistence and colour of the ground:
400 ml are sufficient for approx. 0,8 - 1,0 m²
- **Substrate:**
Thoroughly cleaned, new or second-hand steel or aluminium wheel rim
- **Drying time (at 20°C, 50% relative air humidity):**
Dust-dry: after approx. 10 minutes
Dry to touch: after approx. 30 minutes
The drying time depends on surrounding temperature, air humidity and thickness of the applied coat.
- **Temperature resistance:** to 80°C
- **Storage stability:**
10 years if appropriate storage provided (=10°-25°C, relative air humidity of max. 60%)
- **Size:**
Aerosol cans, maximum nominal volume 400 ml
- **VOC-value:** 273,1g

Environment and labelling

Environmentally sound: European Aerosols is committed to apply formulations without restricted or critical ingredients and to achieve best possible performance. The caps and packagings are made of recyclable material.

Disposal: Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labelling: All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.


Using instructions

Before use, carefully read and observe the warning texts on the label!

- Clean the surfaces to be painted thoroughly with ColorMatic silicone cleaner no. 174469, then sand
- The area must be dry and free of dust and grease
- Shake can vigorously for 2 minutes
- Carry out spray test
- For optimum adhesion before application, the aluminium wheels can be primed with ColorMatic 1K primer for aluminium no. 180 278 - steel wheels with ColorMatic 1K primer filler
- 2-3 coats
- **For professional use only**
- **Wear an appropriate respirator (recommended type A2/P3)**

Hints concerning application

Also suitable for coating exhaust tail-pipes.

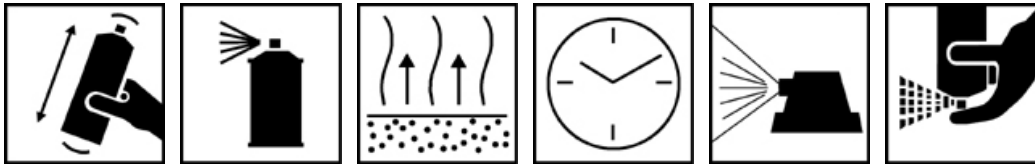

2 min

2-3

5 min

20°C=60 min

Order information

Disclaimer of liability

This application-technological information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively in the responsibility of the user. European Aerosols is let off the liability, unless the liability-based incident is caused by a fault incurred to European Aerosols.

As of July 26, 2010

This release replaces all eventually earlier issued versions

Print date: 29.04.2024

European Aerosols | Wolframweg 2 | 8471 XC Wolvega | NL | info-nl@european-aerosols.com