

Technical information 2K Hi-Speed Clear Coat, Glossy



ColorMatic 2K blanke lak voor koplampen is een speciale hoogglanzende en supertransparante 2-componenten blanke lak met zeer hoge bestendigheid tegen chemicaliën zoals ruitensproeiervloeistof. Deze lak biedt de hoogste bescherming tegen UV, is extreem krasbestendig en verzegelt en beschermt het kunststof oppervlak gedurende meerdere jaren.

Toepassing:

Voor het snel en eenvoudig herstellen van de hoogglans laklaag op kunststof koplampglazen van polycarbonaat. Geschikt voor zowel voor- als achterlichten.

Disposal and labelling

Disposal: Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labelling: All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

Using instructions

Before use, carefully read and observe the warning texts on the label!

- Leave to dry for 5 minutes between coats
- 1-2 coats are recommended

Mixing A components with hardener:

- Remove the protection cap from the bottom of the can and pull the pin out fully with the help of the inserted ring. This will release the knife, which will penetrate the wall of the aluminium cartridge.
- The cartridge will then rotate 360 °, be completely open and release the hardener.
- Shake the can vigorously to mix the A components with the hardener in the proper, predetermined ratio.
- Shake can vigorously for 2 minutes
- Carry out spray tests
- Pot life: 24 hours (20 ° C)


Ready-to-use coating materials containing isocyanates can irritate the respiratory system and cause allergic reactions. There is a risk of sensitization with inhalation of vapours and spray mist. When dealing with substances containing isocyanates, you should observe all guidelines for using solvent-based coatings. In particular, spray mist and vapours should not be inhaled. Allergy and asthma sufferers and people who are prone to respiratory diseases should not work with isocyanates materials.

- For professional use only
- Wear an appropriate respirator (recommended type A2/P3)

Hints concerning application

For an optimal coating result bring can to temperature prior to use (20 - 25 °C) and a relative air humidity of 45 - 60%.

Please note: a high air humidity can cause loss of gloss.

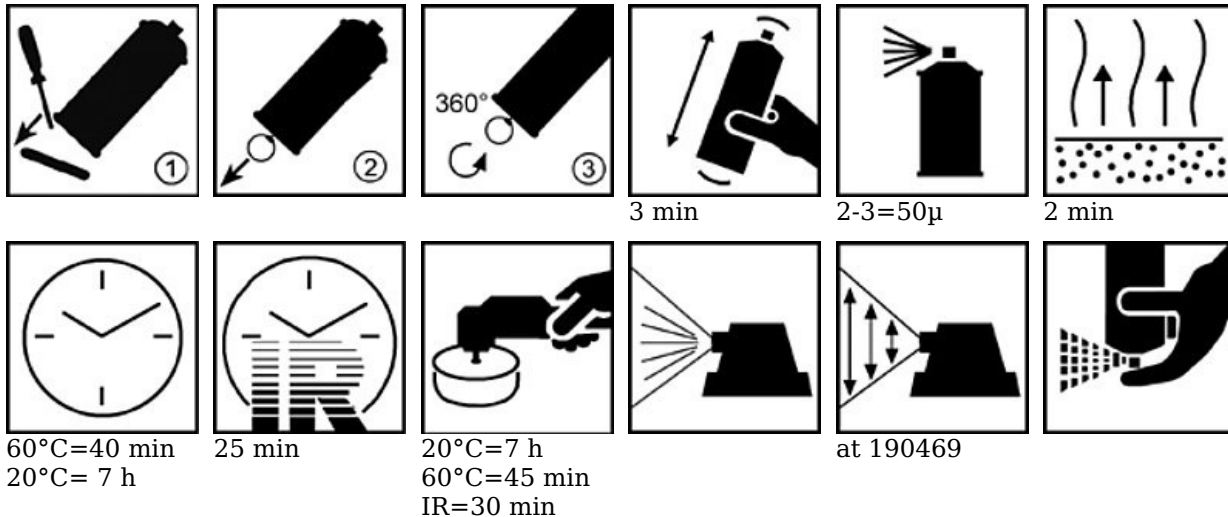

Order information

Disclaimer of liability

This application-technological information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively in the responsibility of the user. European Aerosols is let off the liability, unless the liability-based incident is caused by a fault incurred to European Aerosols.

As of September 30, 2015

This release replaces all eventually earlier issued versions.

Print date: 16.10.2026

European Aerosols | Wolfraamweg 2 | 8471 XC Wolvega | NL | info-nl@european-aerosols.com